


HMF EXPRESS

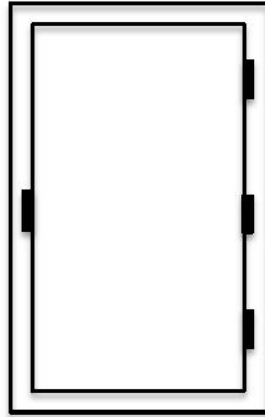

4 Sided Frames

Max Opening Size	Single or Pair	Profile	Max Gauge Steel	KD or Welded	Min Jamb Depth	Max Throat Depth	Min Face size	Max Face size	Anchor Type	Max Fire Rating
4-0 x 8-0	Sgl	Sgl Rabbet	14	KD	3"	4"	1 1/4"	4"	Masonry & Stud	3 Hour
4-0 x 8-0	Sgl	Sgl Rabbet	12	Welded	3"	4"	1 1/4"	4"	Masonry & Stud	3 Hour
4-0 x 8-0	Sgl	Sgl Rabbet	14	KD	3"	4"	1 1/4"	4"	Drywall Compression	90 Min.
4-0 x 8-0	Sgl	Dbl Rabbet	14	KD	4 5/8"	13"	1 1/4"	4"	Masonry & Stud	3 Hour
4-0 x 8-0	Sgl	Dbl Rabbet	12	Welded	4 5/8"	13"	1 1/4"	4"	Masonry & Stud	3 Hour
4-0 x 8-0	Sgl	Dbl Rabbet	14	KD	4 5/8"	13"	1 1/4"	4"	Drywall Compression	3 Hour

Notes: Rated frames must be reinforced for door closer or receive supplemental label for spring hinges

All Fire-Rated Frames will receive a metal UL label

Drop in Sill Not Permitted on KD Frames - All KD Corners Must be Mitered with Gussets

Minimum Size for Fire Rated Frames: 6" wide x 20" High

Minimum Returns: Masonry Profile 3/8", Drywall profile 1/2". Maximum return for both 3/4"

Single Swing Only - No Pairs

