
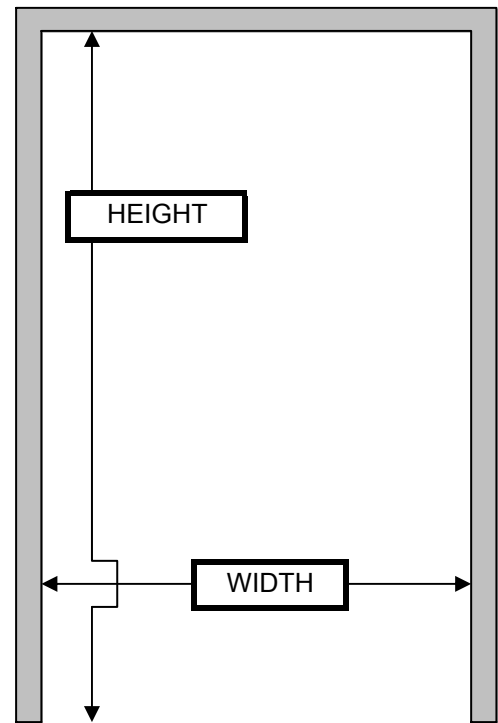


## Standard D Profile 3-Sided Frames (Drywall Cased Open)

FRAME PART	UL RATED	NON RATED
THROAT		
MINIMUM	3 3/4"	2"
MAXIMUM	13"	No Limit
A=Jamb Depth		
MINIMUM	4 5/8"	3"
MAXIMUM	14 1/2"	No Limit
D=ACES		
MINIMUM	1 1/4"	1"
MAXIMUM	4"	No Limit
E=RETURNS		
MINIMUM	7/16"	7/16"
MAXIMUM	3/4"	Varies
F=DW Returns		
MINIMUM	3/8"	3/8"
MAXIMUM	11/16"	Varies
HEIGHT		
MINIMUM	20"	6"
MAXIMUM	96"	No Limit
WIDTH - SGL.		
MINIMUM	6"	6"
MAXIMUM	48"	No Limit
WIDTH PAIR		
MINIMUM	12"	12"
MAXIMUM	96"	No Limit

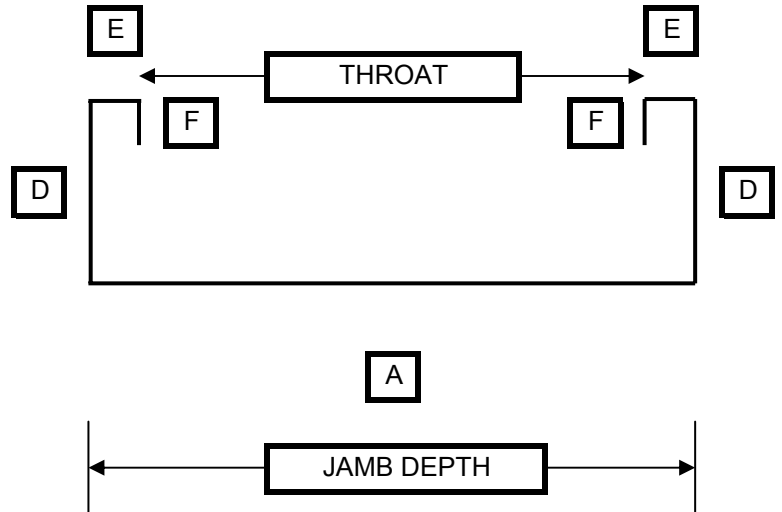

Available KD or Welded (Face Only or Continuous)

KD Rough Opening = Door Opening + 2 3/4" W, + 1" H

UL fire rating (3 Hour max.) only when used for "Total Doors"™.

### ANCHOR OPTIONS

UL - All types

Non UL - SAME