


# HMF EXPRESS

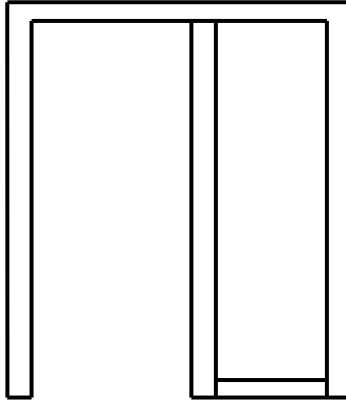

Gypsum Wall Application - Frame sitting on Masonry (Non-Combustable) Floor								
	Glass Type	Max Exposed Area of Glazing (in <sup>2</sup> )	Max Width of Exposed Glazing (in)	Max Height of Exposed Glazing (in)	Max O.A. Frame Width, (in)	Max O.A. Frame Height, (in)	Glazing Bead Size	Max Gauge Steel Allowed
<b>20 min</b>	Firelite Glass	3325	24	82	6' 0"	7' 4"	5/8" x 5/8"	14

	Jamb Faces (in)		Mullion Faces (in)		Sill Faces (in)	
	Min.	Max.	Min.	Max.	Min.	Max.
<b>Firelite Glass</b>	1 1/4"	4	1 1/4"	4	1 1/4"	4

**Notes:** Frames MUST be KD Drywall Profile with Compression Anchors

Loose or Welded in Place Base Anchors Only

Reversed Base Anchors on Mullion - Under Sill

Full Light Only - No Horizontal Mullions Allowed

Door height not to exceed 84" (7' 0")

Door Width not to exceed 36" (3' 0")

Minimum Jamb Depth: 3"

Maximum Jamb Depth: 14"

Frames will receive a metal UL label, and a supplemental label stating Firelite glass and glazing requirements

Side Panels 1296 in<sup>2</sup>, 24" wide, 82" high Maximum. Steel Stiffened Core Req'd.

20 Minute Max. Rating Without Hose Stream Only