


## 4-panel: Top Blank

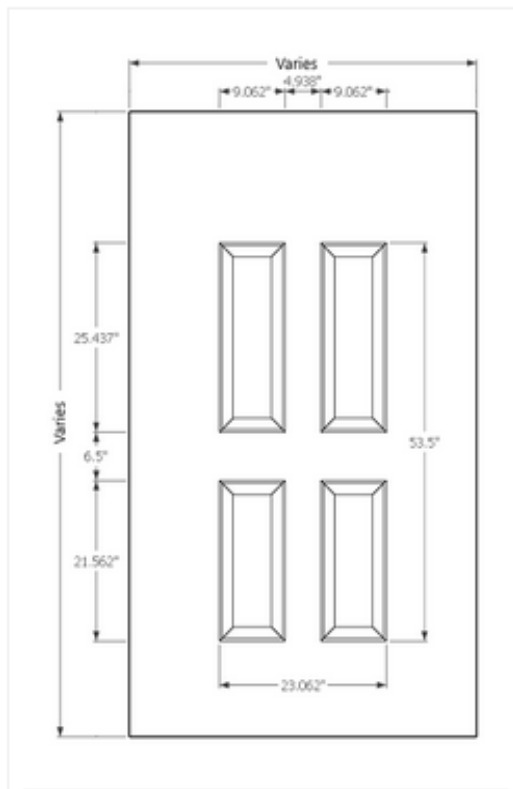

Top blank doors allow for interesting light kits to be installed at the top. With your choice of edge construction and many customization options, this door can fill a range of functional and architectural needs.

### Features

- Customize **hardware preps and reinforcements** for your application
- Any hinge locations
- Both 1 3/8" and 1 3/4" door thicknesses

### Construction Options

- Butted or hemmed, squared or beveled, seamed or seamless **edge options**
- **Inverted or flush, top or bottom channels**
- **Polystyrene core**
- 18 gauge **galvannealed steel** material
- Minimum width with 4 1/4" stiles is 31 9/16"
- Maximum width is 39 5/32" (butted edge), 36 1/4" (hemmed edge)
- Top rail maximum 17 5/8", bottom rail maximum 12 7/8"

### Certifications

- Fire
- Smoke
- Hose stream
- Sound Transmission Class (STC-38)

### Lead Time Options

- Standard: 8 to 10 business days<sup>1</sup>
- Express: 1 to 7 business days<sup>2</sup>

<sup>1</sup> Consult factory for options on larger projects

<sup>2</sup> Lead time based on available capacity at time of order